

Product Information Frontage blind VB 100

Heat protection due to reflection of the heat radiation in front of the facade

Design element for facades with attractive design

Up-to-date colours and numerous designs

Variable installation elements, suitable for numerous facade settings

Easy operation



Models



VB 101 - bar guided



VB 102 - barguided + tilt-out unit



VB 103 - cable guide



VB 104 - rod guide



VB 105 - drop-arm awning



VB 106 - non-split fabric anti-glare blind, bar guided


Limit sizes

Type of operation	Covering	max. surface (m ²)	min. width (mm)	max. width (mm)	min. height (mm)	max. height (mm)		
						KG 100	KG 115	
VB 101	Crank handle drive	Soltis 92/86	9	400	3500	500	4000	4500
	Crank handle drive	Sonstige *)	9	400	3500	500	2500	3000
	Crank handle drive	Acrylstoff, Allwetter, Liberty, SunsilK	5,7	400	1260	500	4000	4500
	Standard-electric drive	Soltis 92/86	9	600	3500	500	4000	4500
	Standard-electric drive	Sonstige *)	9	600	3500	500	2500	3000
	Standard-electric drive	Acrylstoff, Allwetter, Liberty, SunsilK	5,7	600	1260	500	4000	4500
VB 102	Crank handle drive	Soltis 92/86	9	400	3000	1200	4000	4500
	Crank handle drive	Sonstige *)	9	400	3000	1200	2500	3000
	Crank handle drive	Acrylstoff, Allwetter, Liberty, SunsilK	5,8	400	1290	1200	4000	4500
	Standard-electric drive	Soltis 92/86	9	600	3000	1200	4000	4500
	Standard-electric drive	Sonstige *)	9	600	3000	1200	2500	3000
	Standard-electric drive	Acrylstoff, Allwetter, Liberty, SunsilK	5,8	600	1290	1200	4000	4500

Type of operation	Covering	max. surface (m ²)	min. width (mm)	max. width (mm)	min. height (mm)	max. height (mm)	
VB 103 VB 104	Crank handle drive	Soltis 92/86	9	400	3000	500	3000
	Crank handle drive	Sonstige *)	7,5	400	3000	500	2500
	Crank handle drive	Acrylstoff, Allwetter, Liberty, SunsilK	3,7	400	1230	500	3000
VB 103 VB 104	Standard-electric drive	Soltis 92/86	9	600	3000	500	3000
	Standard-electric drive	Sonstige *)	7,5	600	3000	500	2500
	Standard-electric drive	Acrylstoff, Allwetter, Liberty, SunsilK	3,7	600	1230	500	3000
VB 106	Crank handle drive	Soltis 92/86	6	400	2500	500	2500
	Standard-electric drive	Soltis 92/86	6	600	2500	500	2500

Type of operation	Covering	min. width (mm)	max. width (mm)	projection (mm)	
VB 105	Crank handle drive	All	400	3000	600, 900, 1200
	Standard-electric drive	All	600	3000	600, 900, 1200

Box designs

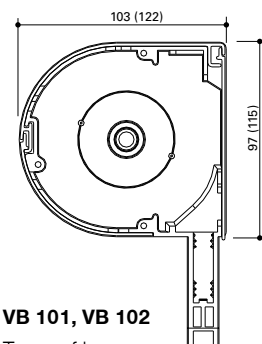


VB 101, VB 102

Type of box:

R100 - extruded in 3 parts

R115 - extruded in 3 parts




VB 103, VB 104, VB 105

Type of box:

R100 - extruded in 2 parts with

hook-in box cover

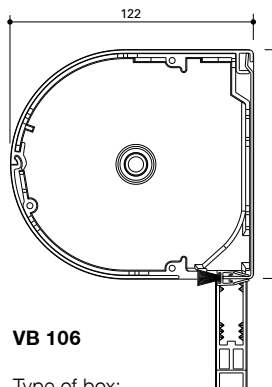

VB 106

Type of box:

R115 - extruded in 3 parts with

canted right roller cover

*) Acrylstoffe, Allwetter, Liberty, SunsilK, Glaxtex, Sunless, Twilight and Transsolair

KG ... Size of box

Qualified company:

Head Office:
HELLA Sonnen- und Wetterschutztechnik GmbH
 A-9913 Abfaltersbach 125
 T. +43 (0)4846 / 65 55-0
 F. +43 (0)4846 / 65 55-134
 E: office@hella.info

www.hella.info